

### Specifications

| Models  | GS-2032 |             | GS-2632 |             | GS-3232 |             |
|---|---------|-------------|---------|-------------|---------|-------------|
| Measurements                                  | Metric  | US          | Metric  | US          | Metric  | US          |
| Working height maximum*                       | 7.90 m  | 25 ft 11 in | 9.93 m  | 32 ft       | 11.75 m | 38 ft       |
| <b>A</b> Platform height maximum w/load sense | 5.90 m  | 19 ft 5 in  | 7.93 m  | 26 ft       | 9.75 m  | 32 ft       |
| <b>B</b> Platform height stowed               | 1.03 m  | 3 ft 5 in   | 1.16 m  | 3 ft 10 in  | 1.29 m  | 4 ft 3 in   |
| <b>C</b> Platform length - outside            | 2.26 m  | 7 ft 5 in   | 2.26 m  | 7 ft 5 in   | 2.26 m  | 7 ft 5 in   |
| extended                                      | 3.18 m  | 10 ft 5 in  | 3.18 m  | 10 ft 5 in  | 3.18 m  | 10 ft 5 in  |
| Slide-out platform extension deck             | 91 cm   | 3 ft        | 91 cm   | 3 ft        | 91 cm   | 3 ft        |
| <b>D</b> Platform width - outside             | 81 cm   | 2 ft 8 in   | 81 cm   | 2 ft 8 in   | 81 cm   | 2 ft 8 in   |
| Guardrail height                              | 1.10 m  | 3 ft 7 in   | 1.10 m  | 3 ft 7 in   | 1.10 m  | 3 ft 7 in   |
| Toeboard height                               | 15 cm   | 6 in        | 15 cm   | 6 in        | 15 cm   | 6 in        |
| <b>E</b> Height - stowed: folding guardrails  | 2.13 m  | 7 ft        | 2.26 m  | 7 ft 5 in   | 2.39 m  | 7 ft 10 in  |
| rails folded                                  | 1.78 m  | 5 ft 9 in   | 1.91 m  | 6 ft 3 in   | 2.03 m  | 6 ft 8 in   |
| Length - stowed                               | 2.44 m  | 8 ft        | 2.44 m  | 8 ft        | 2.44 m  | 8 ft        |
| <b>F</b> Length - extended                    | 3.33 m  | 10 ft 11 in | 3.33 m  | 10 ft 11 in | 3.33 m  | 10 ft 11 in |
| <b>G</b> Width                                | 81 cm   | 2 ft 8 in   | 81 cm   | 2 ft 8 in   | 81 cm   | 2 ft 8 in   |
| <b>H</b> Wheelbase                            | 1.85 m  | 6 ft 1 in   | 1.85 m  | 6 ft 1 in   | 1.85 m  | 6 ft 1 in   |
| <b>I</b> Ground clearance - center            | 9 cm    | 3.5 in      | 9 cm    | 3.5 in      | 9 cm    | 3.5 in      |
| <b>J</b> - with pothole guards deployed       | 2 cm    | 0.88 in     | 2 cm    | 0.88 in     | 2 cm    | 0.88 in     |

### Productivity

|  |                  |                |                  |                |                  |                |
|--|------------------|----------------|------------------|----------------|------------------|----------------|
| Maximum platform occupancy (in/out) <sup>1</sup> | 2/1              | 2/1            | 2/-              | 2/-            | 2/-              | 2/-            |
| Lift capacity                                    | 363 kg           | 800 lbs        | 227 kg           | 500 lbs        | 227 kg           | 500 lbs        |
| Lift capacity - extension deck                   | 113 kg           | 250 lb         | 113 kg           | 250 lb         | 113 kg           | 250 lb         |
| Drive height                                     | full height      |                | full height      |                | 6.71 m           | 22 ft          |
| Drive speed - stowed                             | 3.5 km/h         | 2.2 mph        | 3.5 km/h         | 2.2 mph        | 3.5 km/h         | 2.2 mph        |
| Drive speed - raised                             | 0.8 km/h         | 0.5 mph        | 0.8 km/h         | 0.5 mph        | 0.8 km/h         | 0.5 mph        |
| Gradeability - stowed**                          | 30%              |                | 25%              |                | 25%              |                |
| Max outrigger levelling: front to back           | _____            | _____          | _____            | _____          | 3°               |                |
| Max outrigger levelling: side to side            | _____            | _____          | _____            | _____          | 5°               |                |
| Turning radius - inside                          | zero             | zero           | zero             | zero           | zero             | zero           |
| Turning radius - outside                         | 2.13 m           | 7 ft           | 2.13 m           | 7 ft           | 2.13 m           | 7 ft           |
| Raise / lower speed                              | 28 / 24 sec      | 28 / 24 sec    | 28 / 24 sec      | 28 / 24 sec    | 55 / 28 sec      | 55 / 28 sec    |
| Controls   | proportional     |                | proportional     |                | proportional     |                |
| Drive  | dual front wheel |                | dual front wheel |                | dual front wheel |                |
| Multiple disc brakes                             | dual rear wheel  |                | dual rear wheel  |                | dual rear wheel  |                |
| Tyres - solid non-marking                        | 38 x 13 x 28 cm  | 15 x 5 x 11 in | 38 x 13 x 28 cm  | 15 x 5 x 11 in | 38 x 13 x 28 cm  | 15 x 5 x 11 in |

### Power

|                           |                                    |                                    |                                    |
|---------------------------|------------------------------------|------------------------------------|------------------------------------|
| Power source              | 24 V DC (four 6V 225 Ah batteries) | 24 V DC (four 6V 225 Ah batteries) | 24 V DC (four 6V 225 Ah batteries) |
| Hydraulic system capacity | 17 L                               | 4.5 gal                            | 17 L                               |
|                           |                                    | 4.5 gal                            | 17 L                               |
|                           |                                    |                                    | 4.5 gal                            |

### Sound & Vibration Levels

|   |                       |                           |                       |                           |                       |                           |
|---|-----------------------|---------------------------|-----------------------|---------------------------|-----------------------|---------------------------|
| Sound pressure level (ground workstation)   | <70 dBA               | <70 dBA                   | <70 dBA               | <70 dBA                   | <70 dBA               | <70 dBA                   |
| Sound pressure level (platform workstation) | <70 dBA               | <70 dBA                   | <70 dBA               | <70 dBA                   | <70 dBA               | <70 dBA                   |
| Vibration                                   | <2.5 m/s <sup>2</sup> | <8 ft 2 in/s <sup>2</sup> | <2.5 m/s <sup>2</sup> | <8 ft 2 in/s <sup>2</sup> | <2.5 m/s <sup>2</sup> | <8 ft 2 in/s <sup>2</sup> |


### Weight\*\*\*

|  |          |           |          |           |          |           |
|--|----------|-----------|----------|-----------|----------|-----------|
|  | 2,012 kg | 4,435 lbs | 1,956 kg | 4,313 lbs | 2,352 kg | 5,185 lbs |
|--|----------|-----------|----------|-----------|----------|-----------|

### Standards Compliance

2006/95/EC (LVD)

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC);

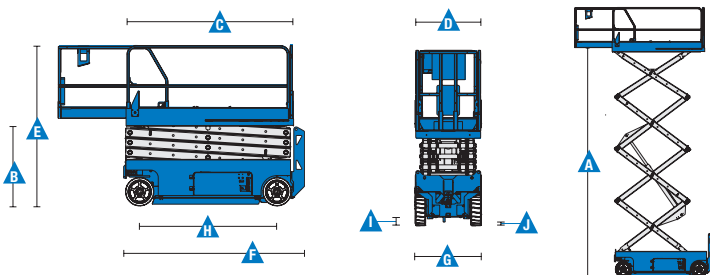

<sup>1</sup> Indoor use only for the GS-2632 and GS-3232

\* The metric equivalent of working height adds 2 m to platform height.

\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\* Weight will vary depending on options and/or country standards.

### Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

#### Measurements

##### GS-2032

- 7.90 m (25 ft 11 in) working height
- Up to 363 kg (800 lbs) lift capacity

##### GS-2632

- 9.93 m (32 ft) working height
- Up to 227 kg (500 lbs) lift capacity

##### GS-3232

- 11.75 m (38 ft) working height
- Up to 227 kg (500 lbs) lift capacity

#### Productivity

- Folding rails with half-height swing gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Electronic horn
- Hour meter
- Telematics-Ready Connector

#### Power

- 24 V DC battery pack
- Universal 20 amp smart charger

#### Platform

- 2.26 x 0.81 m (7 ft 5 in x 2 ft 8 in) steel platform
- 0.91 m (3 ft) extension deck

#### Power

- 24 V DC (four 6 V 225 Ah batteries)

#### Outriggers

- Automatic levelling outriggers (on GS-3232 only, standard)
- No outriggers

#### Drive

- Dual front wheel drive

#### Tyres

- Solid non-marking

#### Productivity Options

- Air line to platform
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace<sup>(1)</sup> (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn

#### Power Options

- Maintenance-free batteries
- Low temperature cut-out module



<sup>(1)</sup> Includes a first 2 years subscription

#### United Kingdom and MESART

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com  
 Middle East, Southern Africa, Russia and Turkey, T: +971 4 399 0381, Email AWP-InfoME@terex.com  
 Visit [www.genielift.com/en-gb/about-genie/locations](http://www.genielift.com/en-gb/about-genie/locations) to view our global locations list.

#### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2019 Terex Corporation.

